

ALUMINUM NON-TRAFFIC
DOUBLE LEAF COVER
ASSEMBLY

4' x 6'-6" x 6' PULLBOX (PARKWAY & SIDEWALK USE WITH ALUMINUM COVER) WITH ADEQUATE NUMBER OF 12" OR 18" VARIABLE SECTION HEIGHTS TO OBTAIN MIN. 3'-0" COVER OVER DUCT ENCASMENT. TWO PIECE SLIP RESISTANT USF ALUM/STEEL COVER TYPE UEZD 48X78 WITH TWO REMOVABLE 3"x24" STAINLESS STEEL PLATES (ONE MARKED WITH "BURBANK ELECTRIC" AND ONE WITH PULLBOX I.D NUMBER) W/2 BOLTS FLUSH W/SURFACE. THE LETTERS & NUMBERS ENGRAVED ON THE PLATE. JENSEN PRECAST ASSEMBLY NO. 200016838 OR OLD CASTLE NO. 070-X005003-001. USF HATCH NO. UEZD 48X78 ALUM/STEEL 1000114834.

PARKWAY & SIDEWALK USE ONLY.
USF HATCH NO. UEZD 48X78 ALUM/STEEL.

FINISHED GRADE

TOP SECTION

VARIABLE SECTION
(if required)


5/8" x 10' GROUND ROD
IN CONDUIT TRENCH (2)
REQUIRED.

BASE SECTION

6" MIN.

COMPACTED ROCK
OR GRAVEL

EXCAVATION AROUND PULLBOX MUST BE FILLED
WITH SLURRY (SINGLE SACK MIX).

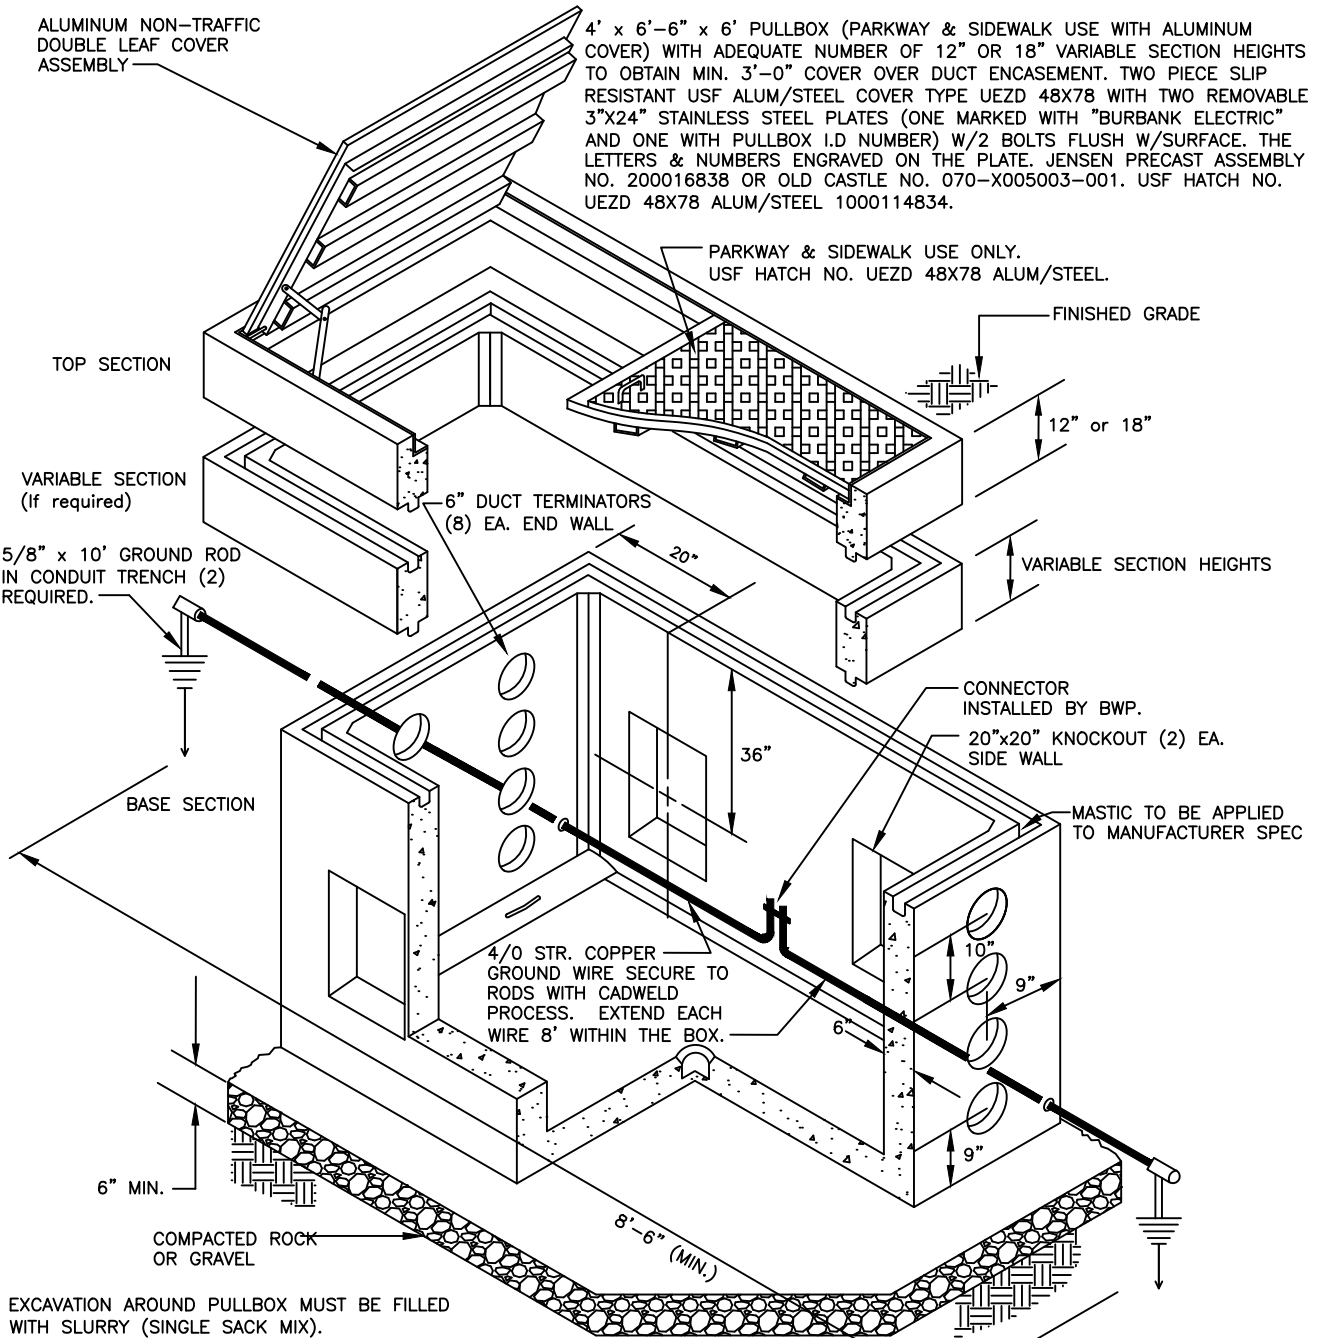

NOTES:

1. MINIMUM 48 HOURS BEFORE ORDERING ANY MATERIAL, STARTING CONSTRUCTION, AND PRIOR TO INSTALLATION, CONTRACTOR MUST CALL BWP INSPECTOR AT 818-238-3590 FOR A PRECONSTRUCTION MEETING TO DISCUSS BWP CONSTRUCTION REQUIREMENTS AND SCHEDULE INSPECTION. MUST CALL 48 HOURS PRIOR TO SCHEDULE ALL INSPECTIONS.
2. THE CONTRACTOR MUST INSTALL THE GROUND RODS AND GROUNDING SYSTEM CALLED FOR IN THIS STANDARD WHILE IN THE PRESENCE OF THE BWP INSPECTOR AND TO THE SATISFACTION OF THOSE REQUIREMENTS DETAILED IN THE LATEST VERSION OF THE NATIONAL ELECTRICAL CODE, ARTICLES 250-83 AND 250-84. SEE DWG. S-821.
3. INSIDE OF BOX TO BE PAINTED WHITE. CONCRETE MIX TO BE MIN 5500 PSI AT 30 DAYS, CONTAIN 3 GAL/CU.YD. CORROSION INHIBITOR (ASTM C1582) AND 3LB/CU.YD. MACRO FIBER (ASTM C1116) TYPES GCP DCI AND GCP STRUX 90/40 OR EQUIVALENT.
4. CONTRACTOR TO ALLOW AT LEAST SIX WEEKS LEAD TIME FOR DELIVERY AND TO PROVIDE PULLBOX I.D. NUMBER TO THE MANUFACTURER AT THE TIME OF ORDER. CONTACT MANUFACTURER TO CONFIRM LEAD TIME.

F	STANDARDIZED FORMATTING	MEP	CJC	5/9/23
E	ADD 6" TERMINATORS/UPDATE MODEL/RENAME.	JF/SK		7/24/19
D	CONVERTED THIS DRAWING FOR PARKWAY AND SIDEWALK RATED P.B. ONLY.	NHS		7/16/09
C	REVISED MFG. & ADDED NEW ASSEMBLY NUMBERS	NHS	DDB	8/24/07
No.	REVISIONS	BY	APPR'V'D	DATE



BURBANK WATER AND POWER - ELECTRIC SERVICES

4'x6'-6"x6' CONCRETE
PULLBOX (SIDEWALK RATED)
AND GROUNDING REQS.

DRAWING No.

S-615F

Sheet 1 of 1